



UGL2430-RTH (1T1R)

Wireless-N 4-Port Broadband Router

Delivers Faster Speed and Farther Range for Wireless Connection



FEATURES

- IEEE802.11n up to 150Mbps Wi-Fi compliant (1T1R)
- Fully backward compatible with IEEE802.11g / b
- 1 x 10/100Mbps WAN + 4 x 10/100Mbps LAN ports
- Supports IEEE802.e Quality of Service (QoS), WMM
- Supports WDS, AP and AP Client operation modes
- Hacker pattern filter (Port Scan, Land attack, DOS)
- Seamless roaming among 802.11n/g/b networks
- Supports 64/128-bit WEP wireless data encryption
- Supports wireless security of WPA, WPA2, 802.1x
- Supports advance WMM (Wi-Fi MultiMedia) function
- Provides Wi-Fi Protected Setup (WPS) push button
- Supports most popular operating systems including Windows 7/2000/XP/Vista/ME/98SE, Mac and Linux
- Supports DHCP Server/Client, NAT Protection, MAC Filter, NAT, URL Blocking, IP Filters, DNS Proxy
- Provides user-friendly Web-based GUI interface for remote management and easy configuration
- Built-in DHCP server to automatic assign IP address
- Supports UPnP (Universal Plug and Play)

Package Contents

- One Wireless-N 4-port Broadband Router
- One Setup Utility / Manual CD-ROM
- One Detachable Antenna
- One RJ-45 Ethernet Cable
- One Power Adapter

OVERVIEW

Up to 150Mbps with faster speed than 11g, UGL2430-RTH is an advanced IEEE 802.11n compatible, high performance, wireless-N 4-port Router that is fully backward compatible with IEEE802.11g/b standards to save your previous wireless network investment. There is also integrated with a built-in infrastructure mode wireless access point and one WAN plus four LAN switches. Therefore, it is an ideal device for home and office networking to a share high speed internet connection with the flexibility, speed and security you need.

In order to solve weakness of wireless signal problem, enhanced MIMO technology enables you to very easily extend the range of your wireless coverage farther than regular IEEE802.11b/g standard. The MIMO technology multiplies the effective data rate and use reflections to increase the range and reduce "dead spots" in the wireless coverage area.

The UGL2430-RTH features Wi-Fi Protected Access (WPA) and 64/128-bit WEP Encryption to provide an enhanced level of security for wireless data communications. It also includes advanced security features such as WPA2 and AES to keep your wireless connection safe from unauthorized access. The new WPS technology will be very easy to set the wireless security just push the button only, all the wireless encryption will auto finish. The router can serves as a DHCP server, has a powerful SPI firewall to protect your PCs against intruders and most known internet attacks, and supports VPN pass-through. This router can let your network to share a high speed cable/DSL internet connection with the ultimate freedom of wireless networking anywhere.


SPECIFICATIONS

Product Specifications	
Standards	IEEE802.3 10Base-T Ethernet IEEE802.3u 100Base-TX Fast Ethernet IEEE802.3x Full-duplex operation and flow control IEEE802.11n Draft 2.0 150Mbps Wireless LAN, 2.4GHz IEEE802.11g 54Mbps Wireless LAN, 2.4GHz IEEE802.11b 11Mbps Wireless LAN, 2.4GHz
Data Rate	802.11n Draft: up to 150Mbps 802.11g: 54 / 48 / 36 / 24 / 18 / 12 / 9 / 6 Mbps Auto Fallback 802.11b: 11/ 5.5 /2/ 1 Mbps Auto Fallback LAN: 10/100Mbps Auto Switch WAN: 10/100Mbps Auto Switch
Frequency Band	2.4GHz ISM (Industrial Scientific Medical) Band
Modulation	802.11n: BPSK, QPSK, 16QAM, 64QAM with OFDM 802.11g: BPSK, QPSK, 16QAM, 64QAM, OFDM 802.11b: DQPSK, DBPSK, DSSS, and CCK
Internet Access	DHCP Server and Client Static IP Dynamic IP PPPoE PPTP L2TP NAT NAPT
Security	WPA2 (802.11i) WPA (Wi-Fi Protected Access) WDS (Wireless Distribution System) WPS (Wi-Fi Protected Setup) 64/128-bit Wired Equivalent Privacy (WEP) Wi-Fi Alliance WMM (Wi-Fi Multimedia Enhancement) IEEE802.1e Quality of Service (QoS) MAC ACL (MAC Access Control List) 802.1x RADIUS Server PAP/CHAP/MS-CHAP/MS-CHAPv2 authentication
Router Feature	DHCP Server and Client NAPT (Network Address and Port Translation) NAT (Network Address Translation) VPN Pass Through –IPSec, PPTP, L2TP Virtual DMZ Host, DNS Proxy, DDNS, UPnP Quality of Service (QoS)
Firewall	MAC Filter Client Filter IP Filter URL Blocking NAT Protection Hacker Pattern Filter (Port Scan, Land Attack, DOS....etc)
Management	Web-based GUI Configuration Web-based GUI Management Telnet Remote Management Web Remote Login from WAN Software upgrade through Web NTP Update System Log Configuration Setting Backup /Restore /Reset Default

SPECIFICATIONS

Hardware Specifications	
Interface	1 x 10/100Mbps WAN Port 4 x 10/100Mbps LAN Switch Ports 1 x WPS Push Button for easy wireless security setting 1 x Reverse SMA Connectors 1 x Reset Button for Restoration of Factory Default Setting
Chipset	Ralink RT3050 (1T1R)
Radio Channel	1 ~ 14 channels (Universal Domain Selection)
Media Access Protocol	CSMA/CA with ACK
Operating Range	Indoor: up to 100 meters (328 feet) Outdoor: up to 400 meters (1312 feet)
Emission Type	Direct Sequence Spread Spectrum (DSSS)
Antenna Type	One 2dBi Dipole Detachable Antennas with Reverse SMA Connectors
RF Output	15 – 18dBm (Typical)
Support OS	Windows 98SE / Me / 2000 / XP / vista / Win 7, Mac OS, Linux
LED Indicator	Power x 1, WAN x 1, LAN x 4, WLAN x 1
Installation	Desktop or Wall-Mount
Dimension	136 (L) x 87 (W) x 24 (H) mm
Weight	145g (Net)
Power	12V DC, 1A External Power Adapter
Operating Temperature	0° ~ 40°C
Humidity	5% ~ 90% (non-condensing)
Compliant	FCC, CE, Wi-Fi Compliant, RoHS

APPLICATION DIAGRAM

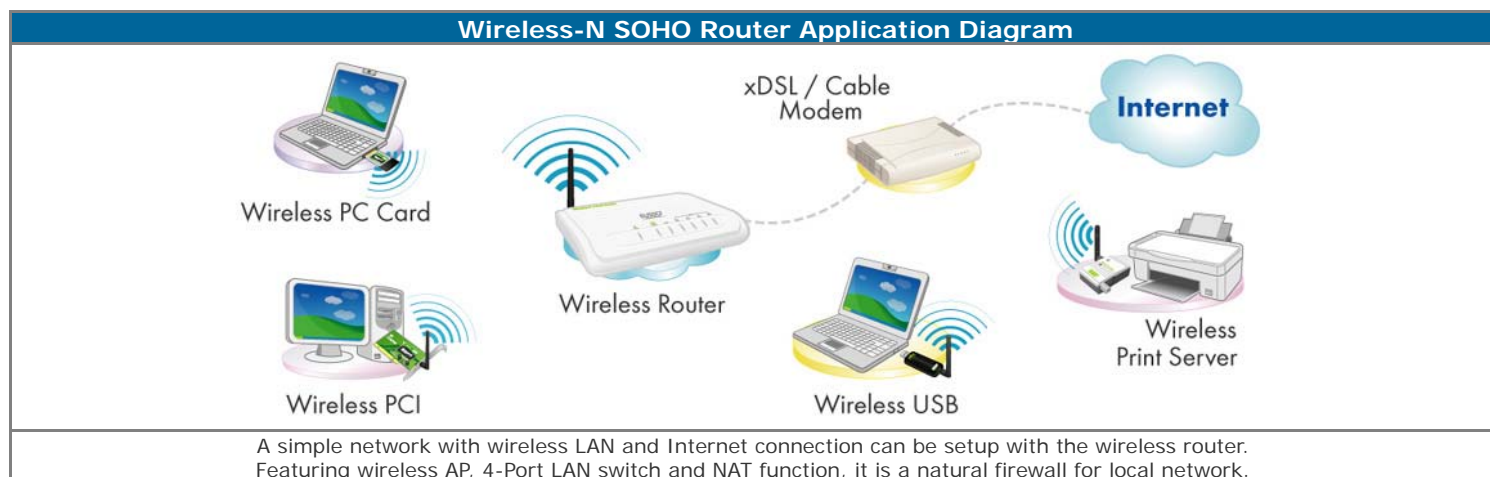

ORDERING INFORMATIONS

Model	Description
UGL2430-RTH	150Mbps Wireless-N 4-Port Broadband Router (1T1R)

EUSSO Technologies, Inc. is a dedicated data communication and networking company. With professional experiences in design, production, marketing and service support, we deliver the full range networking products including Gigabit Ethernet, Fiber Optic, Wireless LAN, Switches, Hubs, LAN cards, PCMCIA adapters, Converter, Transceivers. As well as Internet Telephony Gateway, Print Servers, Internet Sharing Servers and many others.

2010/11/29 ver 1.0



EUSSO Technologies, Inc.

6F, No.389, Sec.2, Chung Shan Road, Chung Ho City, Taipei 235-58, Taiwan

TEL:+886 (2) 8221-4616 E-mail:sales@eusso.com

FAX:+886 (2) 8221-4607 http://www.eusso.com